




# Rack Exhaust Air Deflector- SHEAD

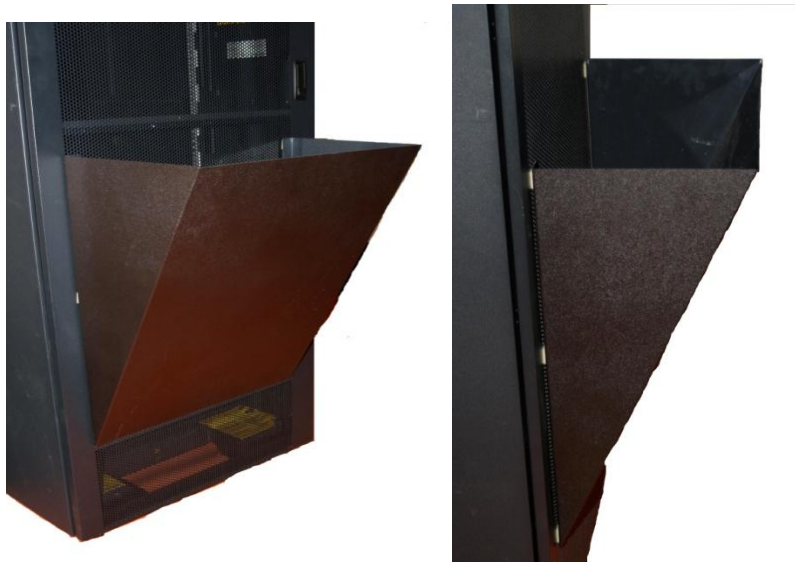

Specifications\* Flame-retardant (UL 94 V-0) Compound

<b>MECHANICAL</b>	<b>Value</b>	<b>Unit</b>	<b>Method</b>
Tensile Stress, break (2.0 in./min.)	5770	PSI	ASTM D638
<b>IMPACT</b>	<b>Value</b>	<b>Unit</b>	<b>Method</b>
Izod Impact, notched 73°F	168	°F	
<b>THERMAL</b>	<b>Value</b>	<b>Unit</b>	<b>Method</b>
HDT, 264 psi, unannealed	168	°F	ASTM D648
<b>FLAMMABILITY</b>	<b>Value</b>	<b>Unit</b>	<b>Method</b>
UL-94 @ .0625"	V-0	N/A	UL-94

**Fire Rating: UL 94-V0 Dimensions:**

**Height- 24 1/2" Width- 20" Depth-12" Wall Dimension-1/16" Weight 1.25 lbs**

\*Specifications subject to change without notice. 2009 Subzero Engineering all rights reserved.