



DATA CENTER | ELITE SERIES

LP LITE DUAL SLIDING DOOR

An Advanced Door
for Light-Duty Applications

Elite Series LP Lite Doors are feature-rich and low-profile in design. They have the rigid design that is inherent of Elite Series Products, but are designed for lighter duty applications. They feature smooth operations, adjustable closing and dampening speeds. Implement the LP Lite Door when you need a cost-effective solution for lighter traffic areas.



LP Lite Profile

1. Taller Header
2. Slimmer Profile



Standard LP Profile

1. Shorter Header
2. Thicker Profile

For more information visit

subzeroeng.com

SUBZERO
ENGINEERING
A SENNECA COMPANY



+ Key Features

- Custom Sizes
- Rigid Design
- Clear Panels
- Soft Closing
- Self Supporting
- No Threshold
- Auto Door Closer
- Smooth Actuation

+ Product Options

- Clear or Black Finish
- Custom Logo Branding

Door & Frame

Property	Material	Result
----------	----------	--------

Physical Properties

Tensile Strength	Aluminum	22,000 psi
------------------	----------	------------

Ordering Information

Max Width	160.00" (4064 mm)
Max Height	100.00" (2540 mm)
Max Width	92.00" (2336.8 mm)
Min Height	80.00" (2032 mm)

Shipping

Physical Properties

Weight	275 lbs. Approx
Components	7 Major Components

Panel Inserts

(Optional)

3mm – Acrylic Flammability

Smoke Dev.	ASTM E84	385
Flame Speed	ASTM E84	140
Horizontal Burn	ASTM D635	1.18 in/min (29.97 mm)
UL Horizontal	UL94	94 HB

4mm – Twin Wall Polycarbonate Flammability



Smoke Dev.	ASTM E84	40
Flame Spread	ASTM E84	5

3mm – FM4910 Flammability


—	UL94	V0
—	FM4910	Yes

Drawings

Top/Plan View NTS

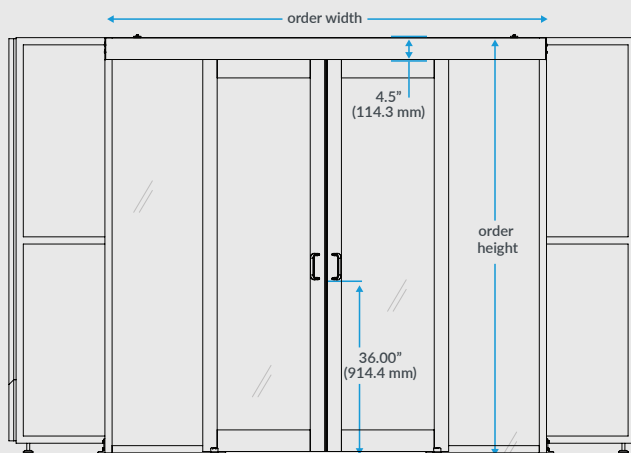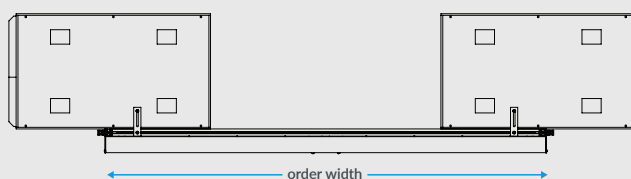

Front View NTS

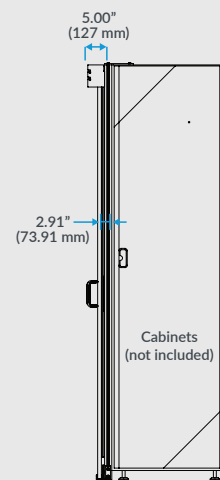

Side View NTS

Effective Opening Chart

Frame Width	Opening Size
92.00" (2336.8 mm)	36.50" (927.1 mm)
98.00" (2489.2 mm)	39.50" (1003.3 mm)
100.00" (2540 mm)	40.50" (1028.7 mm)